

Specifications ThunderION IQ 2.0	
Available effective length	250mm to 4375mm
Calculation Eff.L.	(n x 125)
Overall length	= Eff.L. + 195
(n = variable, number of distance between high voltage points)	

Cordset M12, female straight
 5 m P/N: 7519020365
 10 m P/N: 7519020366
 10 m P/N: 7519020380 (cable chain, shielded)

Cordset M12, female angled
 5 m P/N: 7519020375
 10 m P/N: 7519020376

Connector M12, female straight
 (screw connections)
 P/N: 7519020350 (ø4-6 mm cables)
 P/N: 7519020351 (ø6-8 mm cables)

Connector M12, female angled
 (screw connections)
 P/N: 7519020355 (ø4-6 mm cables)
 P/N: 7519020356 (ø6-8 mm cables)

Connector M12, straight male
 (screw connections)
 P/N: 7519020352 - (ø4-6 mm cables)
 P/N: 7519020353 - (ø6-8 mm cables)

Cordset M12 female-M12 male
 straight connectors
 7519020390 - 2 m, unshielded
 7519020391 - 5 m, unshielded
 7519020392 - 10 m, unshielded
 7519020386 - 5 m, cable chain, unshielded
 7519020387 - 10 m, cable chain, unshielded
 7519020383 - 5 m, cable chain, shielded
 7519020384 - 10 m, cable chain, shielded

IQ Easy platform



Manager IQ Easy
 P/N: 1030000000 - 24 V DC powered
 P/N: 1030000010 - 100-240 V AC powered



Extension IQ Easy
 P/N: 1030000100 - 24 V DC powered
 P/N: 1030000110 - 100-240 V AC powered


* Emitter



Emitter screw
 P/N: 4509001035
 (ThunderION serial number:
 from 14450244)



Emitter, pull
 P/N: 4509001030
 (ThunderION serial number:
 13470001 to 14450243)

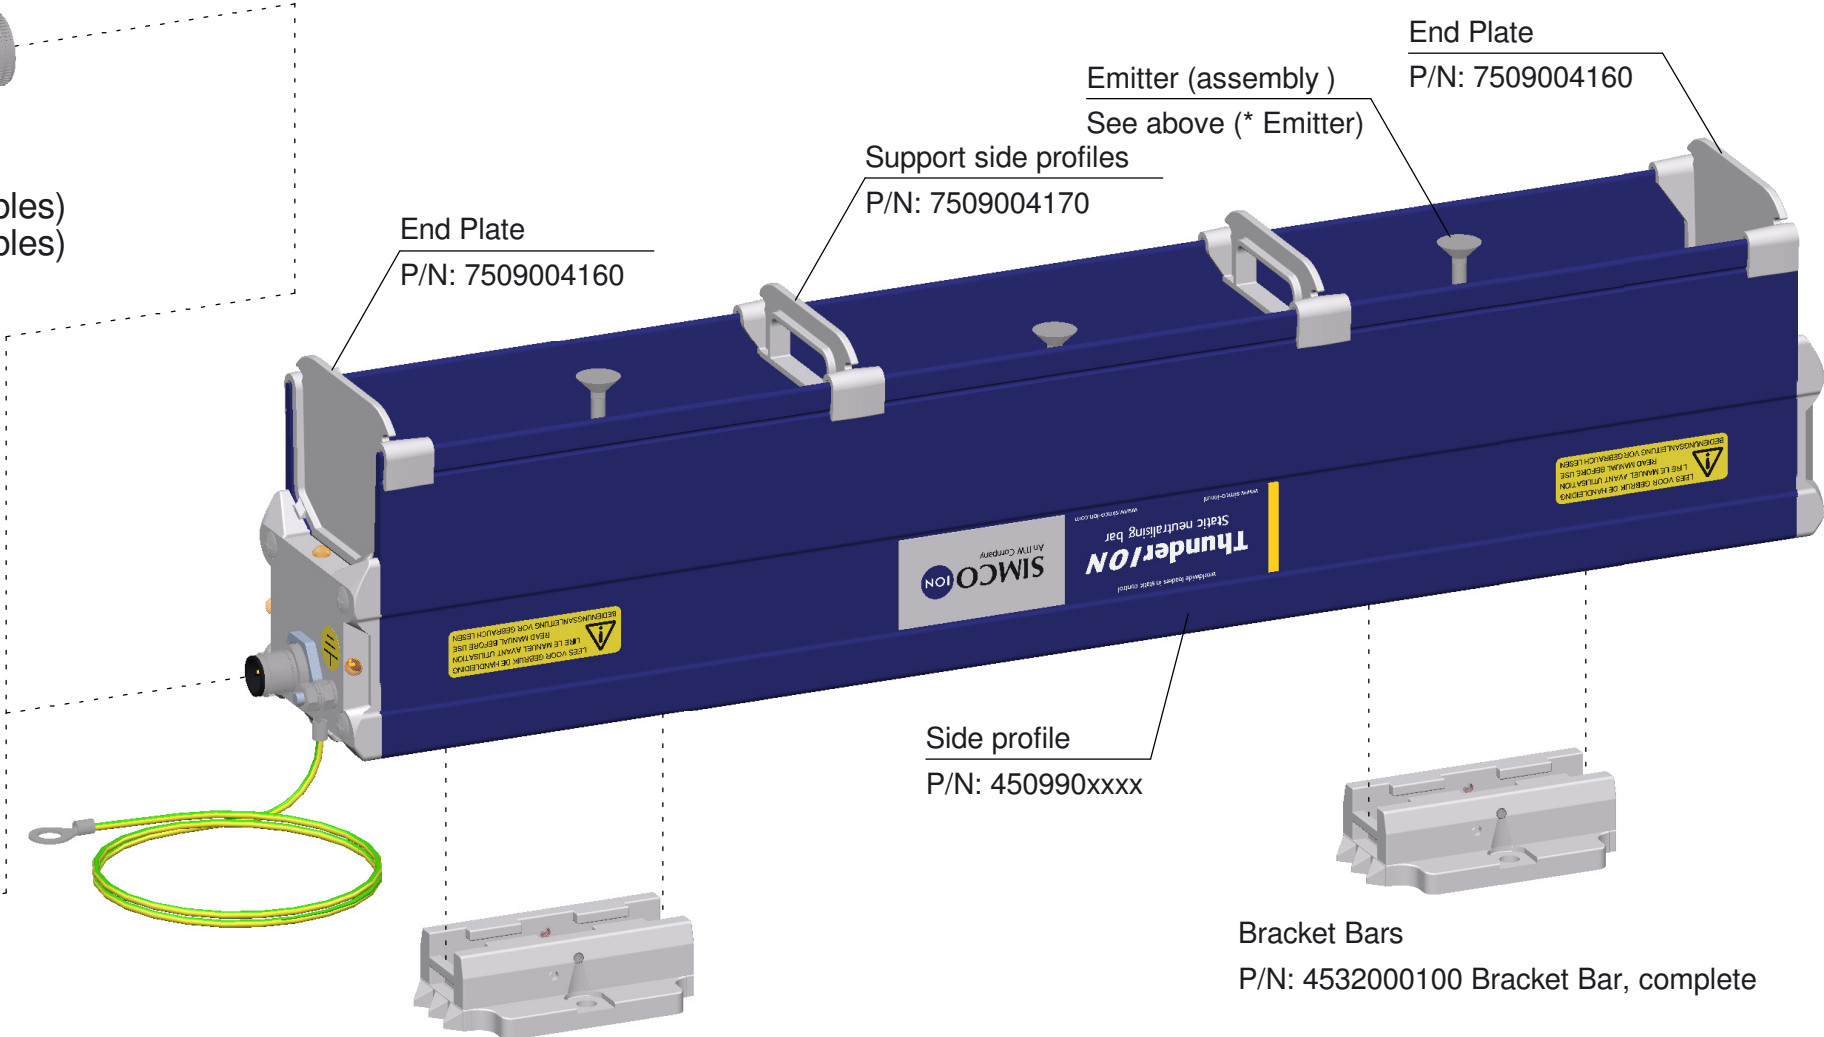

Protection cover



Screw protection
 P/N: 9210560635
 (ThunderION serial number:
 from 14450244)



Cap flex. silicone
 P/N: 9240910520
 (ThunderION serial number:
 13470001 to 14450243)